

INJECTION PUMP SWM 1000

Single Line Polyurethane Grout Injection Pump

Advantages

- Small size and light weight.
- Easy application in a narrow space.
- Easy instead the spare part.
- Low maintenance costs.
- Easy cleaning after used.



Technical specification

Weight	8.0 kg
Maximum plasmoptysis pressure	10.000 psi
Second plasmoptysis pressure	7500 psi
High pressure safe scope	13,500 psi
Power voltage	AC 220V

INJECTION PUMP SWM 2000

Double Line Polyurethane Grout and Epoxy Injection Pump


Advantages

- Double line, special designed for 2 pack injection products.
- Small size and light weight.
- Easy application in a narrow space.
- Easy instead the spare part.
- Low maintenance costs.
- Easy cleaning after used.



Technical specification

Weight	12.0 kg
Mixture ratio	100:100
Plasmoptysis pressure	5000 psi
Power voltage	AC 220V

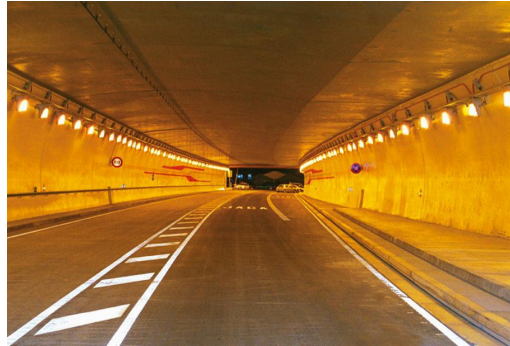

Above pictures only for illustration

Flexifoam TDS 2015-1 edition. Issued 2015 March.

Adchem®

Waterproofing Product